


Narrow/Thin Section Ball Bearings

Narrow/Thin Section deep groove bearings support radial loads and a small degree of axial load in both directions simultaneously. These bearings are popular in many light duty applications and robotics due to their versatility, affordability and ability to run at high speeds.



Bearing Designation	Bore Diameter (D)	Outside Diameter (D)	Width (B)	Dynamic Load C (Lbs)	Static Load Co (Lbs)	Limiting Speed Grease (RPM)
61700 2RS PRX	10mm	15mm	4mm	190	500	15000
61700 ZZ PRX	10mm	15mm	4mm	190	500	15000
61701 2RS PRX	12mm	18mm	4mm	210	530	13000
61701 ZZ PRX	12mm	18mm	4mm	210	530	13000
61702 2RS PRX	15mm	21mm	4mm	212	580	11000
61702 ZZ PRX	15mm	21mm	4mm	212	580	11000
61703 2RS PRX	17mm	23mm	4mm	220	700	9500
61703 ZZ PRX	17mm	23mm	4mm	220	700	9500
61704 2RS PRX	20mm	27mm	4mm	230	720	8500
61704 ZZ PRX	20mm	27mm	4mm	230	720	8500
61705 2RS PRX	15mm	32mm	4mm	240	840	7000
61705 ZZ PRX	15mm	32mm	4mm	240	840	7000
61706 2RS PRX	30mm	37mm	4mm	250	950	5500
61706 ZZ PRX	30mm	37mm	4mm	250	950	5500

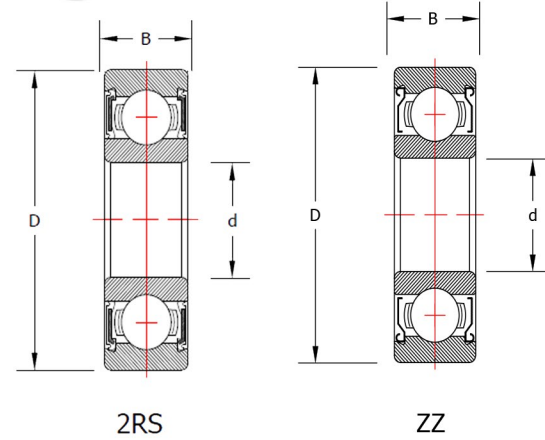

Bearings are sealed & shielded and pre-lubricated with high performance Polyrex EM grease. Open bearings are also available upon request, as are stainless steel configuration's lubricated with food grade grease.