


Ball Thrust Bearing

- Light Cross Section
- Single Direction
- Grooved Races

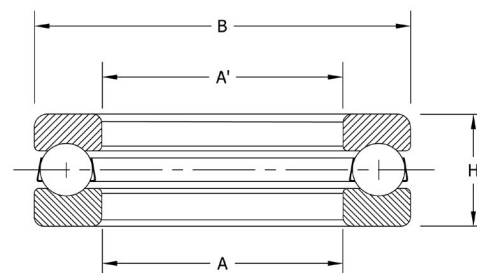

PART NUMBER	A		A ¹	B		H		RET	BALLS		LOAD RATING Lbs.		SPEED LIMIT	BEARING WEIGHT Lbs.
	MM	INCH	INCH	MM	INCH	MM	INCH		No.	SIZE	STATIC	DYNAMIC		
2900	10	0.3937	0.402	26	1.0236	12	0.472	N	8	0.219	2950	2900	8800	0.08
2901	12	0.4724	0.480	28	1.1024	12	0.472	J	10	0.188	2700	2350	8300	0.09
2902	15	0.5906	0.598	31	1.2205	12	0.472	J	12	0.188	3250	2600	7800	0.10
2903	18	0.7087	0.717	35	1.3780	12	0.472	J	14	0.219	5200	3750	7400	0.12
2904	20	0.7874	0.795	37	1.4657	12	0.472	J	14	0.219	4450	3350	7000	0.13
2904-1/2	22	0.8661	0.874	42	1.6535	14	0.551	M	12	0.281	7350	5450	6200	0.21
2905	25	0.9843	0.992	45	1.7717	14	0.551	J	13	0.281	7950	5600	5900	0.21
2906	30	1.1811	1.189	50	1.9685	14	0.551	M	14	0.281	8550	5650	5700	0.27
2907	35	1.3780	1.386	55	2.1654	16	0.630	J	14	0.313	10600	6800	5100	0.32
2908	40	1.5748	1.583	60	2.3622	16	0.630	J	14	0.313	10600	6600	4800	0.33
2909	45	1.7717	1.780	68	2.6772	16	0.630	J	17	0.313	12800	7250	4500	0.43
2910	50	1.9685	1.976	74	2.9134	18	0.709	J	19	0.344	17400	9250	4100	0.59
2911	55	2.1654	2.173	78	3.0709	18	0.709	J	20	0.344	18300	9400	4000	0.60
2912	60	2.3622	2.370	82	3.2283	18	0.709	J	22	0.344	20100	9850	3050	0.63
2913	65	2.5591	2.567	90	3.5433	20	0.787	J	20	0.375	21700	10800	3500	0.78
2914	70	2.7559	2.764	95	3.7402	20	0.787	J	22	0.375	23900	11300	3400	0.88
2915	75	2.9528	2.961	100	3.9370	20	0.787	J	23	0.375	25000	11400	3325	0.92
2916	80	3.1496	3.157	110	4.3307	22	0.866	J	22	0.438	32600	14900	2975	1.30
2917	85	3.3465	3.354	115	4.5276	22	0.866	J	24	0.406	30600	13300	2900	1.50
2918	90	3.5433	3.551	120	4.7244	22	0.866	M	24	0.406	30600	13100	2850	1.60
2919	95	3.7402	3.748	130	5.1181	25	0.984	J	23	0.500	44400	19500	2550	2.00
2920	100	3.9370	3.945	135	5.3150	25	0.984	J	24	0.500	46400	19600	2500	2.30
2921	105	4.1339	4.142	140	5.5115	25	0.984	J	26	0.500	50200	20500	2470	2.20
2922	110	4.3307	4.339	145	5.7087	25	0.984	J	28	0.500	54100	21200	2420	2.30
2923	115	4.5276	4.535	150	5.9055	25	0.984	M	26	0.500	50200	20000	2400	2.60
2924	120	4.7244	4.732	160	6.2992	27	1.063	J	28	0.531	56700	22300	2230	2.40
2925	125	4.9213	4.929	165	6.4961	27	1.063	M	26	0.531	56700	22100	2200	3.60
2928	140	5.5118	5.520	185	7.2835	31	1.220	M	26	0.625	78500	30000	1930	5.40

Materials: Rings and balls are constructed of thru-hardened 52100 steel.
Band is constructed of high quality low carbon steel.

Northeast
Hauppauge, NY
1 (800) 645-5088

Southeast
Atlanta, GA
1 (800) 247-9920

Midwest
Chicago, IL
1 (800) 325-9696
Columbus, OH
1 (888) 700-9144

Southwest
Houston, TX
1 (800) 233-5567
Dallas, TX
1 (800) 500-1015

West Coast
Los Angeles, CA
1 (800) 722-0655