


Ball Thrust Bearing

Inch Dimensions
Grooved Races
Single Acting
Flat Seat



Bearing Designation	Bore Diameter (A)	Outside Diameter (B)	Width (H)	A1	Balls		Dynamic Load C (Lbs)	Static Load Co (Lbs)	Limiting Speed (RPM)	Weight Lbs
					No.	Size				
GT3	0.628"	1.344"	0.563"	0.656"	12	3/16	556	2700	6800	0.14
GT4	0.391"	1.344"	0.563"	0.719"	12	3/16	556	2700	6800	0.14
GT5	0.753"	1.469"	0.563"	0.781"	14	3/16	600	3150	6400	0.16
GT6	0.816"	1.469"	0.563"	0.844"	14	3/16	600	3150	6400	0.15
GT7	0.878"	1.844"	0.625"	0.906"	12	1/4	940	4792	5400	0.27
GT8	0.941"	1.844"	0.625"	0.969"	12	1/4	940	4792	5400	0.27
GT9	1.003"	1.969"	0.625"	1.031"	12	1/4	914	4792	5200	0.30
GT10	1.006"	1.969"	0.625"	1.094"	12	1/4	914	4792	5200	0.29
GT11	1.128"	2.094"	0.625"	1.156"	14	1/4	991	5591	5000	0.29
GT12	1.191"	2.094"	0.625"	1.219"	14	1/4	991	5591	5000	0.31
GT13	1.253"	2.344"	0.625"	1.281"	17	1/4	1085	6789	4800	0.40
GT15	1.378"	2.469"	0.625"	1.406"	17	1/4	1085	6789	4750	0.43
GT17	1.503"	2.594"	0.625"	1.531"	18	1/4	1087	7188	4550	0.46
GT18	1.566"	2.594"	0.625"	1.594"	18	1/4	1087	7188	4550	0.45
GT19	1.628"	2.969"	0.813"	1.656"	16	5/16	1543	9985	3650	0.83
GT23	1.878"	3.219"	0.813"	1.906"	20	5/16	1737	12481	3550	0.95
GT24	1.941"	3.219"	0.813"	1.969"	20	5/16	1737	12481	3550	0.91
GT27	2.128"	3.594"	0.813"	2.156"	18	3/8	2295	16168	3350	1.08
GT28	2.191"	3.594"	0.813"	2.219"	18	3/8	2295	16168	3350	1.06
GT29	2.253"	3.719"	0.813"	2.281"	18	3/8	2295	16168	3300	1.16
GT32	2.441"	3.844"	0.813"	2.469"	18	3/8	2295	16168	3250	1.13
GT33	2.503"	3.969"	0.813"	2.531"	22	3/8	2295	16168	3200	1.20
GT34	2.566"	3.969"	0.813"	2.594"	22	3/8	2601	19760	3200	1.38
GT37	2.753"	4.469"	1.000"	2.781"	20	1/2	4302	31950	2700	1.88
GT41	3.003"	4.719"	1.000"	3.031"	20	1/2	3775	28755	2630	2.08

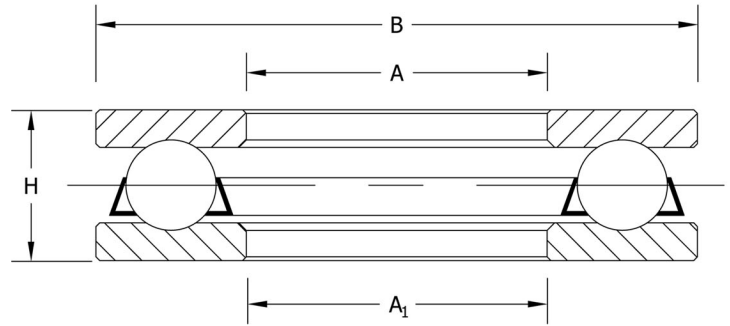

Materials: Rings and balls are constructed of thru-hardened 52100 steel. Retainer is pressed steel. Speed Limit shown is for oil lubrication.

US Corporate Headquarters:
2100 Pacific Street
Hauppauge NY, 11788
www.tritanpt.com